


Mitel 722dt DECT Handset



A refined, high-quality handset with features for professional use in a business or vertical healthcare context

KEY FEATURES

- Large 2.4" TFT color LCD backlight display (240 x 320 pixels 64K)
- Multi-function Alarm button
- Bluetooth 5.0
- Excellent battery capacity
- Speaker grid on backside excellent audio quality
- Battery Li-Ion 3.7 V 920 mAh
- USB Type-C charging port
- Headset port 3.5mm
- IP44 rating

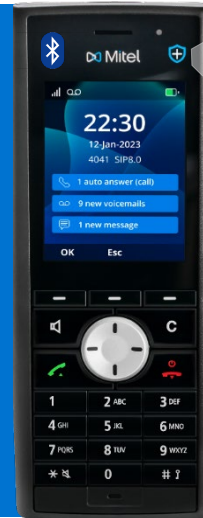

Enjoy seamless connectivity anywhere in your office network

The Mitel 722dt DECT Handset is the business-level handset model in the new Mitel 700 SIP-DECT family. The high-quality handset meets the demand for professional use in various businesses. As the Mitel 722dt DECT handset comes with an alarm button and antimicrobial protection, it is predestined for application in healthcare environments.

The 722dt handset is built using plastics protected with an antimicrobial compound from BioCote*. Ideal for DECT users in shared workspaces.

New Industrial Design

The 722dt series come with new fresh GUI design, that includes a new color scheme, new icons and new navigation, which is based on Mitel's vast experience from decades in the DECT handset market and from our end-customers' feedback from various markets.

Designed for Your Business

Many freely programmable keys support simple navigation and the use of different lines. Equipped with a Bluetooth® interface for a cordless headset, Mitel 722dt allows maximum freedom of movement. The emergency alarm key on top of the handset makes the Mitel 722dt the ideal companion not just for security-related professions, but also for hospitals and other vertical industries.

Handset Features

- High resolution 2.4-inch TFT color LCD backlight display (240 x 320 pixels 64K)
- Adjustable display brightness
- New fresh GUI design, that includes new color scheme, new icons and new navigation
- 4-way Navkey
- Directory with capacity for 200 contacts: with 8 possible entries each (office, private, and mobile number, email address, fax, quick dial, ringing tone, and name assignment)
- Up to 5 user profiles can be configured
- Different ring tones for: internal and external calls, messages, alarm and emergency calls
- 44 polyphone ring tones (Midi type), 29 normal ring tones and 7 alarm tones with automatic volume control
- Multifunctional alarm button
- Prioritized and color-coded messages
- Automatic and manual key lock (shortcut: pound)
- Handset lock option with 4-digit PIN
- Automatic answer when removed from the charger
- Caller list with 50 entries and redial list with 30 entries¹
- A modern USB-C and dedicated 3.5 mm standard headset port
- Side buttons for Volume / Mute (vibrate for silent mode)
- USB Type-C charging port
- Optional microSD card to save local device data
- Display languages: Czech, Danish, Dutch, German, English, Finnish, French, Italian, Norwegian, Polish, Portuguese, Russian, Slovene, Spanish, Swedish, Turkish¹



The Mitel DECT solution

Mitel continues to lead the global DECT handset market by providing unique DECT solutions that deliver over-the-air synchronization, enhanced signal strength, advanced security protocols, HiQ audio quality. The new attractive handsets bring DECT mobile communications into the future with simplicity, elegance and durability.

Antimicrobial

Mitel's 722dt DECT handsets are built using plastics treated with an antimicrobial compound from BioCote* that is shown to inhibit the growth of certain bacteria on the phone's plastic surfaces.

The handset's design also minimizes crevices and holes that might collect germs, dirt, and grime. Making It perfect for use in hospitals, schools, and care homes.

Display

The new large 2.4" DECT handset display applies leading technologies characterized by exceptional performance, user-friendliness, high reliability and a compact format to deliver a new visual experience with DECT communication.

Audio

722dt DECT series supports the 3.5 mm headphone jack to support most used headsets cords in the market. For handsfree mode, the handset now has a speaker and speaker grid on backside of the handset to provide excellent duplex audio speaker quality.

Bluetooth

The 722dt DECT handsets now support Bluetooth® 5.0. Compared to BT 4.0 the coverage area has been multiplied by four. Bluetooth® 5.0 is twice as fast and more power efficient as it can utilize Bluetooth low energy for all compatible devices.

Alarm Handling

Alarm handling has become more important in businesses today, and therefore, the 722dt is equipped with an alarm button. The additional emergency call key makes the Mitel 722dt the ideal companion not just for security-related professions but also for hospitals and other vertical industries.

Charging

The new 700d DECT series can be charged from the desktop charger, rack charger or battery rack charger (that allows for quick replacement of battery). The handset now supports the USB-C to allow for the most common cord charge in market. Using the USB-C also follows the latest EU requirement for all new mobile devices.

Compatibility

The new 700d DECT series requires the latest Mitel SIP-DECT release and will work together with the existing 600d DECT handsets and Mitel SIP DECT base stations. Utilize your existing investment in Mitel infrastructure - No need to rip-and-replace.

Display

- Large 2.4", TFT color LCD backlight display
- Leverage liquid crystals aligned in parallel to produce rich colors
- Multiple colors with high resolution, 262 K individual colors 240 x 320 pixel LCD with white LED backlight

Audio and Codecs

- Loudspeaker:
Duplex loud speaking function
- Earpiece adjustable in 8 steps of 3dB each
- Voice codecs: G.722, G.726
- Ring signal:
Maximum sound level 90 dBA SPL @ 10 cm and adjustable in 8 steps

Connectors

- Multi-purpose connector:
 - » USB-C for fast software download, configuration and battery charging
 - » USB Type-C charging port to support the new EU regulations
- Headset connector:
 - » Standard 3.5 mm

DECT Standards

- Standards: DECT, GAP
- Supports DECT standard encryption
- DECT security certified

User Interaction

- *Indicator:*
Sound indicates incoming call/message and multicolor LED on top for visual indication of incoming call / message
- *Illuminated keypad*
- *Buttons:*
 - » 4 side buttons
 - » 1 alarm button
- *Vibration:*
Incoming call/message.
Buttons & Keys:
3 soft keys, 4-way navigation key, off-hook key, on-hook and power on/off on the same key, numerical keys, sound off key, volume up/down, mute button, configurable buttons

Environmental

Temperature

- *Operating temperature:*
 - » -5°C to 45°C
- *Storage temperature:*
 - » -20°C to 60°C
- *Charging temperature*
 - » +5°C to 45°C

Environmental Test

- *IEC 60068-2-70: Abrasion of markings and letterings caused by rubbing of fingers and hands*
 - » Keypad actuation test: 200,000 strokes/key on keypad
- *Enclosure protection:*
 - » IP44, IEC EN 60529
- *Free fall test (IEC 60068-2-31):*
 - » 1.2 meter (12 times)
- *Immunity of electromagnetic fields:*
 - » 3V/m (EN 61000-4-3)
- *Immunity of ESD:*
 - » 8 kV contact discharge and 15 kV air discharge (EN 61000-4-2)

Battery

- *Li-Ion 3.7 V 920 mA*
- *Charge time: < Less than 4 hours*
- *Discharge/charge cycles: For later testing??*
 - » >= 80% capacity left after 400 full charge/discharge cycles

Radio

Frequency Range

- 1880-1900 MHz
 - » Europe, Africa, Middle East, Australia, New Zealand and parts of Asia
- 1920-1930 MHz
 - » US
- 1910 MHz
 - » Thailand
- 1910-1920 MHz
 - » Brazil
- 1910-1920 MHz
 - » Latin America

Other

- *Modulation: GFSK*
- *Channel spacing: 1,728 MHz*
- *Antenna: Integral*
- *Sensitivity: -93dBm*
- *Maximum average power*
 - » EU/LA/BR: 20 mW (G.722 double slot)
 - » US: 8 mW (G.722 double slot)

Bluetooth

- *Bluetooth radio spectrum:*
 - » ISM 2.4000-2.4835 GHz
- *Output power:*
 - » Class 2, maximum 4 dBm

Bluetooth Compliance

- *European Union:*
 - » EN 300328, EN 301489-17
- *Australian and New Zealand:*
 - » EN 300328, EN 301489-17,
 - » AUS/NZS-4771

Safety

- European and UK:
 - » EN 62368-1
- USA:
 - » UL 62368-1
- Canada:
 - » CSA 60950-1,
 - » CAN/CSA-C22.2 NO. 62368-1

European and UK Regulations

- European Union:
 - » 2014/53/EU (RED)
 - » 2015/863 (RoHS3) amending directive 2011/65/EU
 - » 22012/19/EU (WEEE)
 - » 94/62/EC with amendmen2015/720 (Packaging and packaging waste)
 - » 22006/66/EC (Battery Directive)
 - » Regulation 1907/2006 (REACH)
- UK:
 - » FCC Part 15D
 - » FCC Part 15B

EMC/Radio

- European Union and UK:
 - » EN 301489-6
 - » EN 301489-1
 - » EN 301406 (Radio)
- USA:
 - » FCC Part 15D
 - » FCC Part 15B
 - » FCC Part 15 C (Bluetooth)
- Canada
 - » RSS-213
 - » RSS-247 (Bluetooth)
- Australian and New Zealand
 - » Radiocommunications Act 1992
 - » Telecommunications Act 1997

Product Marking

- European Union:
 - » CE
 - » UK Conformity Assessed
 - » WEEE 2002/96/EC
- USA:
 - » CSA
 - » FCC ID:BXZDH9
 - » HAC
- Canada
 - » CSA
 - » IC: 3724B-DH9
- Australian and New Zealand
 - » R-NZ

Other

- Size (l x w x d): 146 x 56 x 22 mm / 5.7 x 2.2 x 0.9 in (excl. clip)
- Weight: 158 g (incl. clip) (5.6 oz)
- MicroSD card interface
- Material: Covers: PC/ABS, Key pad: ABS, Clip: PA
- Clip: Basic Clip

Accessories

- Mitel 700d Desktop Charger
- Mitel 700d Battery Rack Charger
- Mitel 700d Charger Rack (Set)
- Security Chain
- Carrying Case
- Mitel 722dt Battery Pack
- Mitel 722dt Security/Swivel Clip
- Mitel 722dt Basic Clip
- Silicon Case

†Must be supported by platform

*Tested against certain viruses, not including COVID-19.

Note: BioCote® technology does not protect users or others against disease-causing microbes including the COVID-19 and is not a substitute for good hygiene and/or cleaning practices. BioCote® antimicrobial additives are EPA(US) registered. BioCote® is the registered trademark of Biocote Limited.

BioCote® is the registered trademark of BioCote Limited